

5.343 sequence_folding

	DESCRIPTION	LINKS	GRAPH	AUTOMATON
Origin	J. Pearson			
Constraint	<code>sequence_folding(LETTERS)</code>			
Argument	<code>LETTERS : collection(index-int, next-dvar)</code>			
Restrictions	$ \text{LETTERS} \geq 1$ <code>required(LETTERS, [index, next])</code> $\text{LETTERS.index} \geq 1$ $\text{LETTERS.index} \leq \text{LETTERS} $ <code>increasing_seq(LETTERS, index)</code> $\text{LETTERS.next} \geq 1$ $\text{LETTERS.next} \leq \text{LETTERS} $			
Purpose	<p>Express the fact that a sequence is folded in a way that no crossing occurs. A sequence is modelled by a collection of letters. For each letter l_1 of a sequence, we indicate the next letter l_2 located after l_1 that is directly in contact with l_1 (l_1 itself if such a letter does not exist).</p>			
Example	$\left(\begin{array}{ll} \text{index} - 1 & \text{next} - 1, \\ \text{index} - 2 & \text{next} - 8, \\ \text{index} - 3 & \text{next} - 3, \\ \left\langle \begin{array}{ll} \text{index} - 4 & \text{next} - 5, \\ \text{index} - 5 & \text{next} - 5, \\ \text{index} - 6 & \text{next} - 7, \end{array} \right\rangle \\ \text{index} - 7 & \text{next} - 7, \\ \text{index} - 8 & \text{next} - 8, \\ \text{index} - 9 & \text{next} - 9 \end{array} \right)$			
	<p>Figure 5.677 gives the folded sequence associated with the previous example. Each number represents the index of an item. The <code>sequence_folding</code> constraint holds since no crossing occurs.</p>			
Typical	$ \text{LETTERS} > 2$ <code>range(LETTERS.next) > 1</code>			
Usage	Motivated by RNA folding [167].			
See also	implies (items to collection): lex_alldifferent, lex_chain_less.			
Keywords	application area: bioinformatics. characteristic of a constraint: automaton, automaton without counters, reified automaton constraint.			

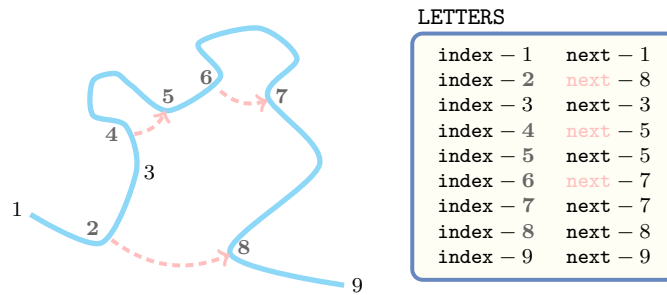


Figure 5.677: Folded sequence (in blue) of the **Example** slot: links from a letter to a distinct letter are represented by a dashed arc, while self-loops are not drawn

combinatorial object: sequence.

constraint type: decomposition.

geometry: geometrical constraint.

Arc input(s)	LETTERS
Arc generator	$\text{SELF} \mapsto \text{collection}(\text{letters})$
Arc arity	1
Arc constraint(s)	$\text{letters.next} \geq \text{letters.index}$
Graph property(ies)	$\text{NARC} = \text{LETTERS} $
Arc input(s)	LETTERS
Arc generator	$\text{CLIQUE}(<) \mapsto \text{collection}(\text{letters1}, \text{letters2})$
Arc arity	2
Arc constraint(s)	$\bigvee \left(\begin{array}{l} \text{letters2.index} \geq \text{letters1.next}, \\ \text{letters2.next} \leq \text{letters1.next} \end{array} \right)$
Graph property(ies)	$\text{NARC} = \text{LETTERS} * (\text{LETTERS} - 1) / 2$

Graph model

Parts (A) and (B) of Figure 5.678 respectively show the initial and final graph associated with the **Example** slot. Since we use the **NARC** graph property, the arcs of the final graph are stressed in bold.

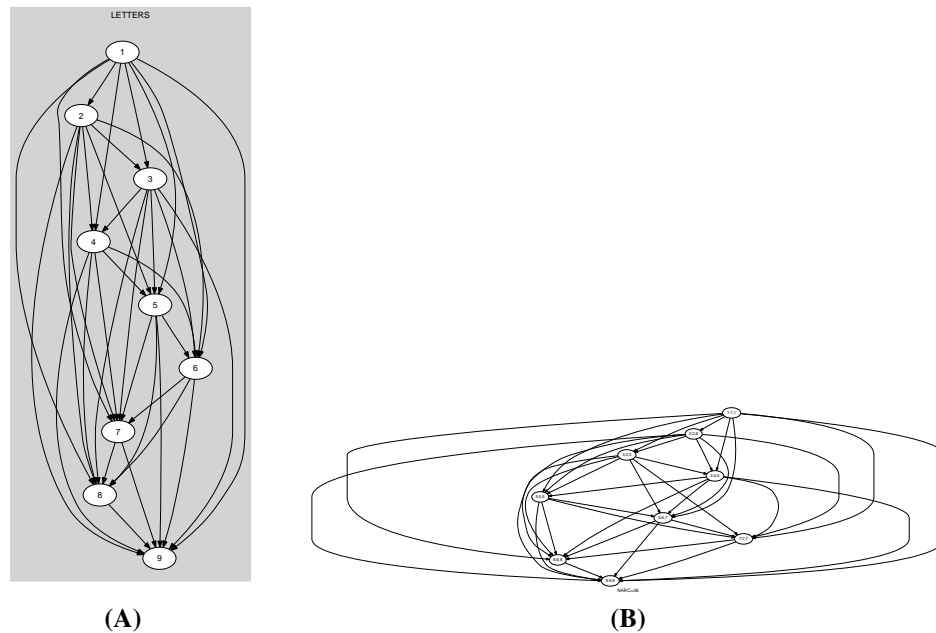


Figure 5.678: Initial and final graph of the `sequence_folding` constraint

Signature

Consider the first graph constraint. Since we use the *SELF* arc generator on the `LETTERS` collection the maximum number of arcs of the final graph is equal to $|\text{LETTERS}|$. Therefore

we can rewrite the graph property $\mathbf{NARC} = |\mathbf{LETTERS}|$ to $\mathbf{NARC} \geq |\mathbf{LETTERS}|$ and simplify \mathbf{NARC} to \mathbf{NARC} .

Consider now the second graph constraint. Since we use the $CLIQUE(<)$ arc generator on the $\mathbf{LETTERS}$ collection the maximum number of arcs of the final graph is equal to $|\mathbf{LETTERS}| \cdot (|\mathbf{LETTERS}| - 1)/2$. Therefore we can rewrite the graph property $\mathbf{NARC} = |\mathbf{LETTERS}| \cdot (|\mathbf{LETTERS}| - 1)/2$ to $\mathbf{NARC} \geq |\mathbf{LETTERS}| \cdot (|\mathbf{LETTERS}| - 1)/2$ and simplify \mathbf{NARC} to \mathbf{NARC} .

Automaton

Figure 5.679 depicts the automaton associated with the `sequence_folding` constraint. Consider the i^{th} and the j^{th} ($i < j$) items of the collection `LETTERS`. Let INDEX_i and NEXT_i respectively denote the `index` and the `next` attributes of the i^{th} item of the collection `LETTERS`. Similarly, let INDEX_j and NEXT_j respectively denote the `index` and the `next` attributes of the j^{th} item of the collection `LETTERS`. To each quadruple $(\text{INDEX}_i, \text{NEXT}_i, \text{INDEX}_j, \text{NEXT}_j)$ corresponds a signature variable $S_{i,j}$, which takes its value in $\{0, 1, 2\}$, as well as the following signature constraint:

$$(\text{INDEX}_i \leq \text{NEXT}_i) \wedge (\text{INDEX}_j \leq \text{NEXT}_j) \wedge (\text{NEXT}_i \leq \text{NEXT}_j) \Leftrightarrow S_{i,j} = 0 \wedge$$

$$(\text{INDEX}_i \leq \text{NEXT}_i) \wedge (\text{INDEX}_j \leq \text{NEXT}_j) \wedge (\text{NEXT}_i > \text{INDEX}_j) \wedge (\text{NEXT}_j \leq \text{NEXT}_i) \Leftrightarrow S_{i,j} = 1.$$

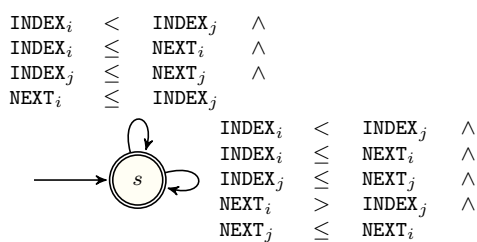


Figure 5.679: Automaton of the `sequence_folding` constraint

20030820

2059