

5.19 alldifferent_on_intersection

	DESCRIPTION	LINKS	GRAPH	AUTOMATON
Origin	Derived from common and alldifferent .			
Constraint	<code>alldifferent_on_intersection(VARIABLES1, VARIABLES2)</code>			
Synonyms	<code>alldiff_on_intersection</code> , <code>alldistinct_on_intersection</code> .			
Arguments	VARIABLES1 : collection (var–dvar) VARIABLES2 : collection (var–dvar)			
Restrictions	required (VARIABLES1, var) required (VARIABLES2, var)			
Purpose	The values that both occur in the VARIABLES1 and VARIABLES2 collections have only one occurrence.			
Example	$(\langle 5, 9, 1, 5 \rangle, \langle 2, 1, 6, 9, 6, 2 \rangle)$ <p>The <code>alldifferent_on_intersection</code> constraint holds since the values 9 and 1 that both occur in $\langle 5, 9, 1, 5 \rangle$ as well as in $\langle 2, 1, 6, 9, 6, 2 \rangle$ have exactly one occurrence in each collection.</p>			
Typical	$ VARIABLES1 > 1$ $ VARIABLES2 > 1$			
Symmetries	<ul style="list-style-type: none"> Arguments are permutable w.r.t. permutation (VARIABLES1, VARIABLES2). Items of VARIABLES1 are permutable. Items of VARIABLES2 are permutable. All occurrences of two distinct values in VARIABLES1.var or VARIABLES2.var can be swapped; all occurrences of a value in VARIABLES1.var or VARIABLES2.var can be renamed to any unused value. 			
Arg. properties	<ul style="list-style-type: none"> Contractible wrt. VARIABLES1. Contractible wrt. VARIABLES2. 			
See also	common keyword: common , nvalue_on_intersection (<i>constraint on the intersection</i>). implied by: disjoint . implies: same_intersection . root concept: alldifferent .			

Keywords

characteristic of a constraint: all different, automaton, automaton with array of counters.

constraint arguments: constraint between two collections of variables.

constraint type: constraint on the intersection, value constraint.

final graph structure: connected component, acyclic, bipartite, no loop.

Arc input(s)	VARIABLES1 VARIABLES2
Arc generator	<i>PRODUCT</i> \mapsto <code>collection(variables1, variables2)</code>
Arc arity	2
Arc constraint(s)	<code>variables1.var = variables2.var</code>
Graph property(ies)	<u>MAX_NCC</u> \leq 2
Graph class	<ul style="list-style-type: none"> • <u>ACYCLIC</u> • <u>BIPARTITE</u> • <u>NO_LOOP</u>

Graph model

Parts (A) and (B) of Figure 5.43 respectively show the initial and final graph associated with the **Example** slot. Since we use the MAX_NCC graph property we show one of the largest connected components of the final graph. The alldifferent_on_intersection constraint holds since each connected component has at most two vertices. Note that all the vertices corresponding to the variables that take values 5, 2 or 6 were removed from the final graph since there is no arc for which the associated equality constraint holds.

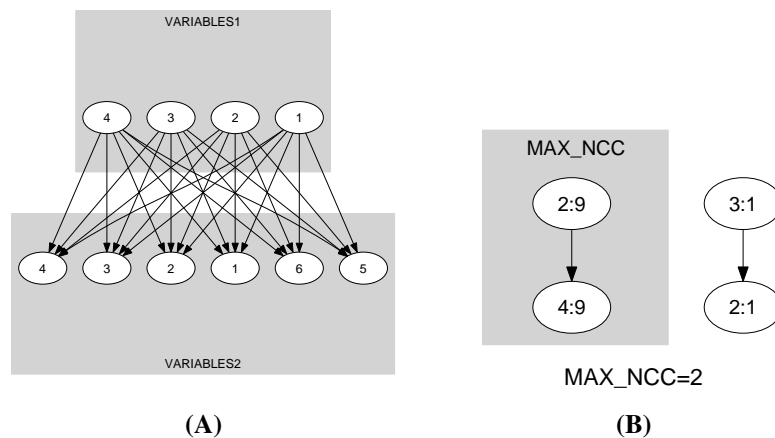


Figure 5.43: Initial and final graph of the alldifferent_on_intersection constraint

Automaton

Figure 5.44 depicts the automaton associated with the `alldifferent_on_intersection` constraint. To each variable VAR1_i of the collection `VARIABLES1` corresponds a signature variable S_i that is equal to 0. To each variable VAR2_i of the collection `VARIABLES2` corresponds a signature variable $S_{i+|\text{VARIABLES1}|}$ that is equal to 1. The automaton first counts the number of occurrences of each value assigned to the variables of the `VARIABLES1` collection. It then counts the number of occurrences of each value assigned to the variables of the `VARIABLES2` collection. Finally, the automaton imposes that each value is not taken by two variables of both collections.

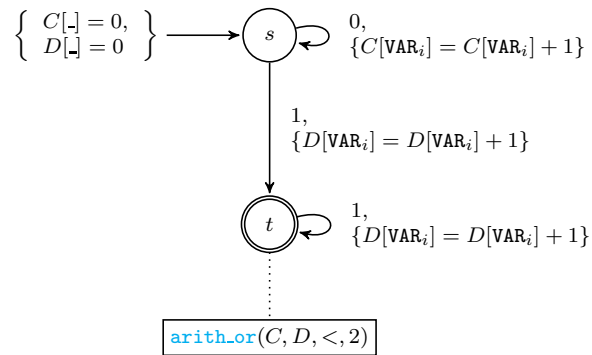


Figure 5.44: Automaton of the `alldifferent_on_intersection` constraint