

5.324 polyomino

	DESCRIPTION	LINKS	GRAPH
Origin	Inspired by [195].		
Constraint	polyomino(CELLS)		
Argument	$\text{CELLS} : \text{collection} \left(\begin{array}{l} \text{index} - \text{int}, \\ \text{right} - \text{dvar}, \\ \text{left} - \text{dvar}, \\ \text{up} - \text{dvar}, \\ \text{down} - \text{dvar} \end{array} \right)$		
Restrictions	<pre> CELLS.index ≥ 1 CELLS.index ≤ CELLS CELLS ≥ 1 required(CELLS, [index, right, left, up, down]) distinct(CELLS, index) CELLS.right ≥ 0 CELLS.right ≤ CELLS CELLS.left ≥ 0 CELLS.left ≤ CELLS CELLS.up ≥ 0 CELLS.up ≤ CELLS CELLS.down ≥ 0 CELLS.down ≤ CELLS </pre>		
Purpose	<p>Enforce all cells of the collection CELLS to be connected and to form a single block. Each cell is defined by the following attributes:</p> <ol style="list-style-type: none"> 1. The <code>index</code> attribute of the cell, which is an integer between 1 and the total number of cells, is unique for each cell. 2. The <code>right</code> attribute that is the index of the cell located immediately to the right of that cell (or 0 if no such cell exists). 3. The <code>left</code> attribute that is the index of the cell located immediately to the left of that cell (or 0 if no such cell exists). 4. The <code>up</code> attribute that is the index of the cell located immediately on top of that cell (or 0 if no such cell exists). 5. The <code>down</code> attribute that is the index of the cell located immediately above that cell (or 0 if no such cell exists). <p>This corresponds to a polyomino [195].</p>		

Example

$$\left(\begin{array}{l} \left\langle \begin{array}{l} \text{index} - 1 \quad \text{right} - 0 \quad \text{left} - 0 \quad \text{up} - 2 \quad \text{down} - 0, \\ \text{index} - 2 \quad \text{right} - 3 \quad \text{left} - 0 \quad \text{up} - 0 \quad \text{down} - 1, \\ \text{index} - 3 \quad \text{right} - 0 \quad \text{left} - 2 \quad \text{up} - 4 \quad \text{down} - 0, \\ \text{index} - 4 \quad \text{right} - 5 \quad \text{left} - 0 \quad \text{up} - 0 \quad \text{down} - 3, \\ \text{index} - 5 \quad \text{right} - 0 \quad \text{left} - 4 \quad \text{up} - 0 \quad \text{down} - 0 \end{array} \right\rangle \end{array} \right)$$

The polyomino constraint holds since all the cells corresponding to the items of the CELLS collection form one single group of connected cells: the i^{th} ($i \in [1, 4]$) cell is connected to the $(i + 1)^{\text{th}}$ cell. Figure 5.654 shows the corresponding polyomino.




Figure 5.654: Polyomino corresponding to the **Example** slot where each cell contains the index of the corresponding item within the CELLS collection

Symmetries

- Items of CELLS are **permutable**.
- Attributes of CELLS are **permutable** w.r.t. permutation (index) (right, left) (up) (down) (*permutation applied to all items*).
- Attributes of CELLS are **permutable** w.r.t. permutation (index) (right) (left) (up, down) (*permutation applied to all items*).
- Attributes of CELLS are **permutable** w.r.t. permutation (index) (up, left, down, right) (*permutation applied to all items*).

Usage

Enumeration of polyominoes.

Keywords

combinatorial object: pentomino.

final graph structure: strongly connected component.

geometry: geometrical constraint.

puzzles: pentomino.

Arc input(s)	CELLS
Arc generator	<i>CLIQUE</i> (\neq) \mapsto collection(cells1, cells2)
Arc arity	2
Arc constraint(s)	$\bigvee \left(\begin{array}{l} \bigwedge \left(\begin{array}{l} \text{cells1.right} = \text{cells2.index}, \\ \text{cells2.left} = \text{cells1.index} \end{array} \right), \\ \bigwedge \left(\begin{array}{l} \text{cells1.left} = \text{cells2.index}, \\ \text{cells2.right} = \text{cells1.index} \end{array} \right), \\ \text{cells1.up} = \text{cells2.index} \wedge \text{cells2.down} = \text{cells1.index}, \\ \text{cells1.down} = \text{cells2.index} \wedge \text{cells2.up} = \text{cells1.index} \end{array} \right)$
Graph property(ies)	<ul style="list-style-type: none"> • NVERTEX = CELLS • NCC = 1

Graph model

The graph constraint models the fact that all the cells are connected. We use the *CLIQUE*(\neq) arc generator in order to only consider connections between two distinct cells. The first graph property **NVERTEX** = |CELLS| avoid the case isolated cells, while the second graph property **NCC** = 1 enforces to have a single group of connected cells.

Parts (A) and (B) of Figure 5.655 respectively show the initial and final graph associated with the **Example** slot. Since we use the **NVERTEX** graph property the vertices of the final graph are stressed in bold. Since we also use the **NCC** graph property we show the unique connected component of the final graph. An arc between two vertices indicates that two cells are directly connected.

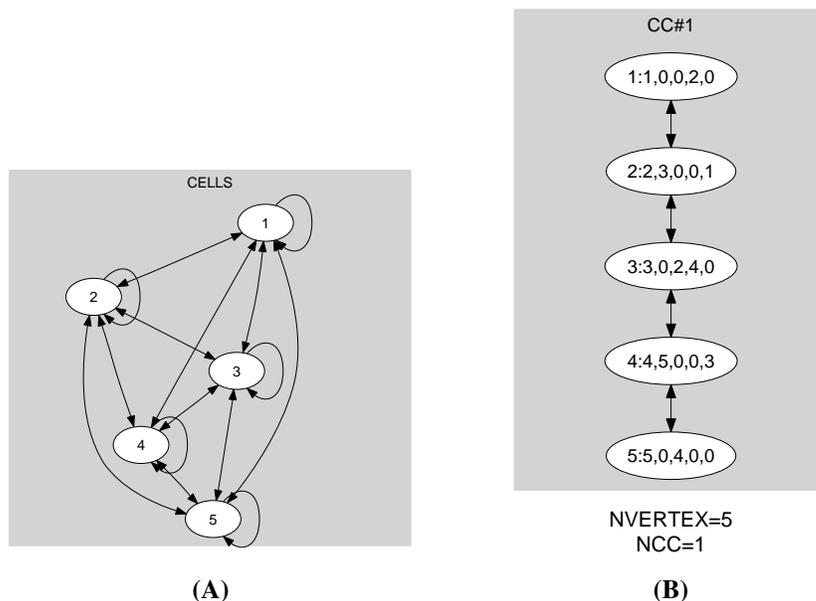


Figure 5.655: Initial and final graph of the polyomino constraint

Signature

From the graph property $N\text{VERTEX} = |\text{CELLS}|$ and from the restriction $|\text{CELLS}| \geq 1$ we have that the final graph is not empty. Therefore it contains at least one connected component. So we can rewrite $N\text{CC} = 1$ to $N\text{CC} \leq 1$ and simplify $\overline{N\text{CC}}$ to $N\text{CC}$.